

80W Contractor Wall Pack

Now cut-off, DLC listed

Value priced with a traditional look

Ideal for exterior security & entryway lighting



TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	10,407
Efficacy	131.12 lm/W
CCT	5000K
CRI	80
Dimmable	Yes
Rated hours	50,000
Warranty	10-year


APPROVALS AND LISTINGS

cUL	E482965
DLC	PL89G70PPG9E

DIMENSIONS

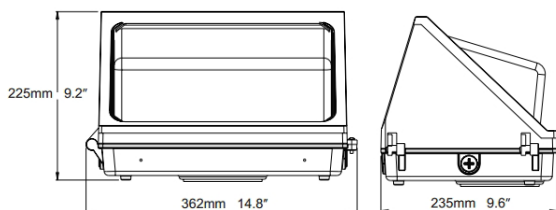

ISOCANDELA PLOT

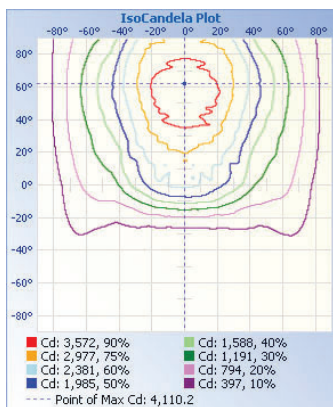

ELECTRICAL

Wattage	80W
Voltage	120-240V
Power factor	0.94
THD	15%
Operating temp	-30-40°C

CONSTRUCTION

Housing	Aluminum Borosilicate glass
Finish	Multi-coat powder
Colour	Bronze
IP rating	IP65
Weight	10.91 lbs
Carton qty	1
Carton size	430 x 295 x 290mm

ILLUMINANCE AT A DISTANCE

Distance (ft)	Illuminance at a Distance	
	Center Beam fc	Beam Width
17.0ft	8.59 fc	49.5 ft 34.0 ft
34.0ft	2.15 fc	99.0 ft 68.0 ft
51.0ft	0.95 fc	148.5 ft 102.0 ft
68.0ft	0.54 fc	198.1 ft 136.0 ft
85.0ft	0.34 fc	247.6 ft 169.9 ft
102.0ft	0.24 fc	297.1 ft 203.9 ft

■ Vert. Spread: 111.0°
■ Horiz. Spread: 90.0°